



# EXOTIC

AUTOMATION & SUPPLY

## Parker QuickFit™ Oil Change System



Parker Hannifin's QuickFit Oil Change System revolutionizes the process with a faster, cleaner and safer way to change engine oil. In three easy steps, purge, extract and refill your system with new oil without ever spilling a drop. QuickFit helps you simplify your routine maintenance, increase productivity and virtually eliminate the risk of spills and contamination.

### Industries

- Heavy Machinery
- Fleet / Trucking
- Municipalities
- OEMS
- Transportation
- Power Generation
- Rental Companies
- Waste Management

**Exotic Automation & Supply  
is a Factory Authorized  
Installer & Trainer!**

## Why QuickFit System?

**Faster.**

**15**

Minutes or Less to change oil with the QuickFit System.

**Safer.**

**75%**

Improvement in safety conditions for oil changes.

**Cleaner.**

**100%**

Elimination of oil spills, leaks and drips.

# Never Change Oil the Same Way Again!



## Components:

**The QuickFit Oil Change System has everything you need:**

- Parker QuickFit Valve
- Parker Push-Lok Hose
- Parker Adapters/Fittings
- Parker QuickFit Bracket
- Equipment specific Installation Guide, complete with images and detailed instructions

## Three Simple Steps


### ① Purge Filter

- Attach compressed air supply to Filter Purge Tool (FPT)
- Connect FPT to QuickFit Valve
- Hold lever on FPV for 10 seconds
- Disconnect FPT




### ② Evac Oil

- Connect waste oil suction hose to QuickFit Valve
- Turn on waste oil pump
- Replace oil filter while the pump is removing the oil from the sump
- Disconnect when oil is removed

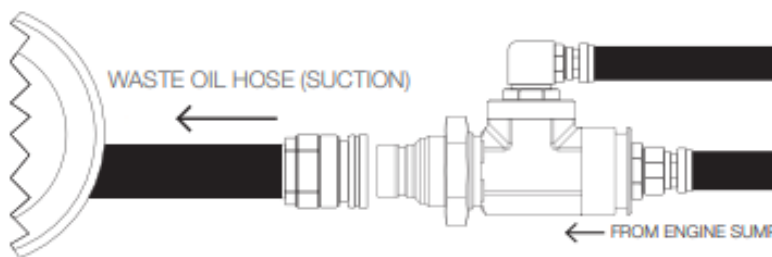

### ③ Refill Oil

- Connect clean oil hose
- Turn on oil pump to refill clean oil through new filter
- Disconnect clean oil line when refilled to capacity

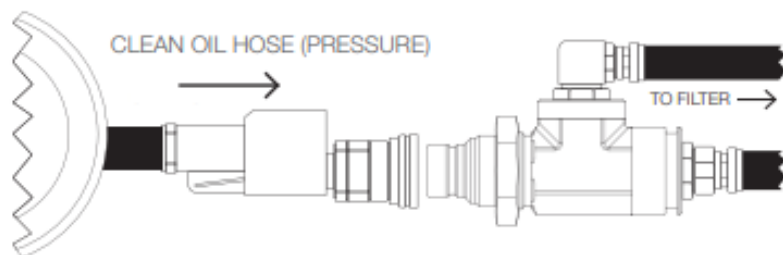

Watch the video to see how the QuickFit Oil Change System is a cleaner, faster and safer alternative to a traditional oil change.